

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 March 2004 (04.03.2004)

PCT


(10) International Publication Number  
**WO 2004/019016 A1**

- (51) International Patent Classification<sup>7</sup>: **G01N 21/35**
- (21) International Application Number:  
PCT/EP2002/009021
- (22) International Filing Date: 12 August 2002 (12.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **BOREALIS TECHNOLOGY OY** [FI/FI]; P.O. Box 330, FIN-06101 Porvoo (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MATHISEN, Rune** [NO/NO]; Borealis AS, N-3960 Stathelle (NO). **KARSTANG, Terje** [NO/NO]; Borealis AS, N-3960 Stathelle (NO).
- (74) Agent: **JACKSON, Robert, Patrick**; Frank B. Dehn & Co., 179 Queen Victoria Street, London EC4V 4EL (GB).

- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MEASUREMENT OF BATCH PROPERTIES

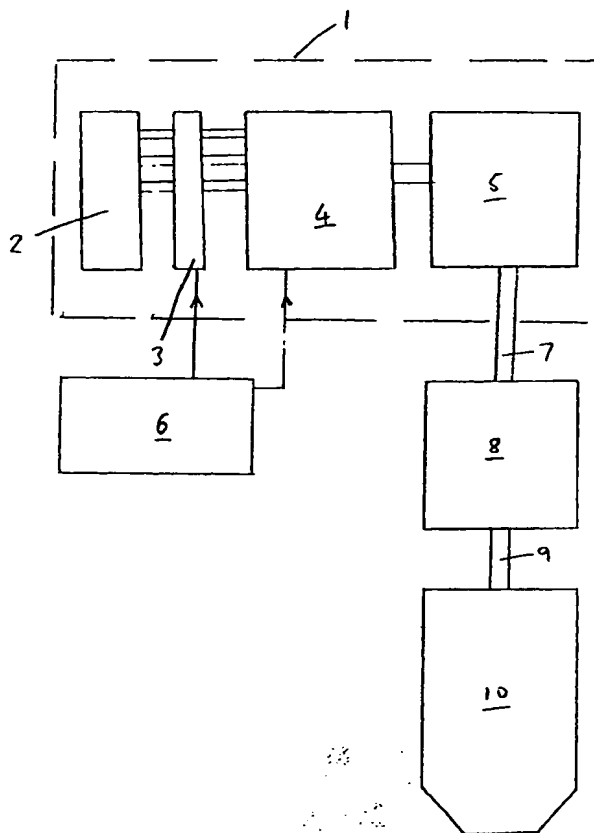

(57) **Abstract:** A bulk property of a product such as pelletised polymer is monitored during production and used as a control input. The polymer is produced in conventional plant (1). Polymer fluff from the plant flows, along conduit (7) to extruder (8) where it is pelletised. The (10) pellets are fed via conduit (9) to silo (10). The plant is controlled by a computerized control system (6). As polymer passes along conduit (7), weight loss feeder (11) measures its mass flow rate. It is then passed through NIR spectrometer. The mass flow rate and the NIR data (15) are transmitted to data processor (13) where they are used to calculate firstly the instantaneous polymer density and then the bulk density of the polymer in the silo. The output from a data processor (13) is fed to process controller (6) which, if necessary, makes suitable (20) adjustments to process conditions.